

Retrieving and Refining: A Hybrid Framework with Large Language Models for Rare Disease Identification

Jinge Wu^{1,4}, Hang Dong², Zexi Li³, Arijit Patra⁴, Honghan Wu^{1,5}

¹University College London, ²University of Exeter,

³University of Oxford, ⁴UCB Pharma, ⁵University of Glasgow

jinge.wu.20@ucl.ac.uk, arijit.patra@ucb.com, honghan.wu@ucl.ac.uk

Abstract

The infrequency and heterogeneity of clinical presentations in rare diseases often lead to underdiagnosis and their exclusion from structured datasets. This necessitates the utilization of unstructured text data for comprehensive analysis. However, the manual identification from clinical reports is an arduous and intrinsically subjective task. This study proposes a novel hybrid approach that synergistically combines a traditional dictionary-based natural language processing (NLP) tool with the powerful capabilities of large language models (LLMs) to enhance the identification of rare diseases from unstructured clinical notes. We comprehensively evaluate various prompting strategies on six large language models (LLMs) of varying sizes and domains (general and medical). This evaluation encompasses zero-shot, few-shot, and retrieval-augmented generation (RAG) techniques to enhance the LLMs' ability to reason about and understand contextual information in patient reports. The results demonstrate effectiveness in rare disease identification, highlighting the potential for identifying underdiagnosed patients from clinical notes.

1 Introduction

Rare diseases, affecting less than 200,000 individuals in the United States and fewer than 1 in 2,000 people in Europe, pose a significant diagnostic challenge due to their low prevalence and diverse clinical manifestations. These characteristics hinder accurate diagnosis, effective treatment, and comprehensive research (Schieppati et al., 2008). The underdiagnosis of rare diseases, stemming from diagnostic challenges, often results in the absence of these conditions in structured datasets, limiting epidemiological studies and research efforts (Stoller, 2018). Unstructured clinical text data, such as clinical notes, offers a rich source of information for rare disease identification but manual curation is laborious and subjective (Griggs et al., 2009). Au-

tomated natural language processing (NLP) tools that can effectively extract symptoms or diagnoses from unstructured clinical text data play crucial role for improving rare disease patients diagnosis, treatment, and research. These tools have the potential to revolutionize the field by enabling large-scale rare disease identification, facilitating the better medical practice for these vulnerable patients in the healthcare system.

Traditional approaches to disease identification often rely on manual curation by domain experts, which is time-consuming, labor-intensive, and subject to human biases. To address these challenges, there has been a growing interest in developing computational methods for automated identification. Dictionary-based NLP tools have been widely used to extract structured information from unstructured clinical narratives, such as electronic health records (EHRs) and scientific literature (Wu et al., 2018; Dong et al., 2023). These tools leverage predefined rules and dictionaries to identify and normalize phenotypic concepts. However, dictionary-based systems often struggle with the complexity and variability of natural language, leading to sub-optimal performance in capturing the nuances of rare disease phenotypes.

Recent advancements in large language models (LLMs), such as GPT (Achiam et al., 2023) and LLaMA (Touvron et al., 2023) series, have revolutionized the field of NLP. These models, pretrained on vast amounts of text data, have demonstrated remarkable capabilities in understanding and generating human-like language. By leveraging the knowledge embedded in LLMs, researchers can potentially enhance the performance of dictionary-based NLP tools for rare disease identification. However, LLMs are susceptible to biases present in their training data and can struggle with factual accuracy, particularly in specialized domains like medicine. Furthermore, their "black box" nature makes it difficult to understand their reasoning and

identify potential errors (Wang et al., 2023).

To address these limitations, we propose a novel hybrid approach that combines the strengths of ontology and dictionary-based NLP tools with the capabilities of LLMs. This approach leverages the interpretability and control of dictionary-based systems to guide the LLM’s analysis, potentially improving its accuracy and focus on identifying rare diseases within unstructured clinical data. Our main contributions can be concluded as follows:

- We propose a novel hybrid framework that integrates ontology and dictionary-based NLP tools with fine-tuned LLMs to enhance the accuracy of rare disease identification from clinical notes. This approach leverages the strengths of both techniques: the high recall of dictionary-based systems guided by a comprehensive vocabulary derived from ORDO/UMLS and the contextual understanding of LLMs.
- To optimize contextual reasoning within the hybrid framework, we conduct extensive experiments with diverse LLMs, exploring various prompt methods (zero-shot, few-shot, retrieval-augmented generation (RAG)) and context lengths. These experiments provide valuable insights into the impact of these factors on rare disease identification accuracy.
- We further apply our methods to the large scale real-world patient notes. Our analysis reveals a substantial number of potential rare disease cases that are not currently documented in structured diagnostic records. This finding highlights the immense potential of our method for uncovering hidden rare disease cases, facilitating early diagnosis, and ultimately improving patient outcomes and treatment development.

2 Related Work

2.1 Rare Disease Identification as Text Phenotyping with Ontologies

Cohort identification is the task of finding cases of disease from clinical records (Ford et al., 2016), usually through clinical codes (e.g., ICD) or unstructured data (e.g., texts). When free text clinical notes are used as sources, this task is called *text phenotyping*. Ontologies are a key source for rare disease identification. The key ontologies include, Human Phenotype Ontology (HPO)

(Robinson et al., 2008), Orphanet (Weinreich et al., 2008), and the Online Mendelian Inheritance in Man (OMIM) (Hamosh et al., 2000). They are linked to other more general ontologies like The unified medical language system (UMLS) (Bodenreider, 2004), and ICD-10 (Organization, 2004). These resources provide structured information on rare diseases and their associated phenotypes. Text phenotyping with ontologies can be formalised as a named entity recognition and contextual entity linking task (Dong et al., 2023), as the aim is to find disease concepts under a positive context.

2.2 Natural Language Processing for Text Phenotyping

Dictionary-based NLP tools such as cTAKES (Savova et al., 2010), SemEHR (Wu et al., 2018), and MedCAT (Kraljevic et al., 2019) have been widely used to extract information from clinical narratives, such as EHRs and scientific literature. These tools capitalize on predefined rules and dictionaries to identify and normalize phenotypic concepts, enabling the transformation of raw textual data into a structured format for further analysis and utilization. However, they often struggle with the variability and ambiguity of natural language, which rely on predefined rules and dictionaries to identify and normalize phenotypic concepts. The semantic meaning of phrases and sentences can be ambiguous, with different interpretations depending on the context and background knowledge. Such tools may lack the ability to handle such semantic nuances.

Machine learning and deep learning models have been applied to automate phenotyping from EHRs and other clinical data sources. Logistic regression, support vector machines, and random forests have been used to extract phenotypic information (Kirby et al., 2016; Yu et al., 2018), while convolutional neural networks (CNNs) and recurrent neural networks (RNNs) have shown promise in identifying and classifying phenotypes from structured and unstructured data (Gehrmann et al., 2018), and more recent methods utilise BERT pre-training (Li et al., 2020). However, the performance of these models on rare disease phenotyping is limited by the scarcity of labeled training data and the complexity of rare disease phenotypes.

LLMs like the GPT (Achiam et al., 2023) and LLaMA (Touvron et al., 2023) series have demonstrated remarkable performance in various NLP

tasks, including named entity recognition (NER), relation extraction (RE), and question answering (QA) (Lee et al., 2020; Rasmy et al., 2021). However, their potential of the recent autoregressive LLMs for rare disease identification remains largely unexplored. One exception is the work of (Oniani et al., 2023), which explored prompting strategies of LLMs for text identification, however, the work focuses on the 4 most frequent rare diseases in the MIMIC-IV dataset, instead of the full set of thousands of rare diseases in an ontology, which will be explored in this work.

3 Methods

Figure 1 summaries our overall work. In this work, we propose a novel hybrid approach that integrates dictionary-based NLP tools and fine-tuned LLMs for improved rare disease identification. Our approach leverages domain-specific knowledge from rare disease ontologies and expert-curated phenotype annotations to enhance the understanding of rare disease identification by LLMs. Furthermore, we explore the use of different prompting strategies including zero-shot, few-shot, RAG as well the context length for the effectiveness of LLMs inference.

3.1 Rare Disease Terminology from Ontology

To construct a comprehensive vocabulary of rare diseases, we leverage the Orphanet Rare Disease Ontology (ORDO) (Weinreich et al., 2008). ORDO provides a structured nomenclature and ontological representation of rare disease concepts. We extract all disease concepts and their associated synonyms from ORDO to form our initial rare disease term list. However, rare diseases often suffer from name variations and inconsistent terminology usage (Shen et al., 2014), hindering effective identification and extraction from clinical text. To address this challenge, we utilize UMLS as an intermediary dictionary (Bodenreider, 2004). UMLS integrates numerous biomedical vocabularies, including standard disease terminologies. By mapping ORDO disease concepts to their corresponding UMLS concept unique identifiers (CUIs), we leverage the extensive synonymy information in UMLS to expand our rare disease term coverage. This process results in a final vocabulary of 4,064 rare disease phenotype mappings from ORDO to UMLS. To align our rare disease phenotypes with the diagnostic coding system used in the dataset for

this study, we further map the identified phenotypes to their corresponding ICD-9 (Organization et al., 1988) and ICD-10 (Organization, 2004) codes, as patients in the dataset are coded using either or both of these classification systems.

3.2 Dictionary-Based Text Phenotyping

We first leverage a dictionary-based NLP tool, SemEHR (Wu et al., 2018), for initial clinical entity extraction from unstructured EHRs. SemEHR excels at extracting and normalizing diverse clinical concepts, including diseases, medications, and procedures. It employs advanced techniques like named entity recognition and entity linking to identify relevant clinical information and map it to standardized terminologies like UMLS. This initial extraction serves as the foundation for subsequent rare disease identification.

To optimize SemEHR for rare disease identification, we leverage rare disease concept mappings derived in the previous step. These mappings connect potential rare disease mentions with corresponding ORDO and UMLS concepts. By harnessing the strengths of both expert-curated ontologies and advanced NLP techniques, this approach allows for the accurate and efficient extraction of valuable disease-related information from large EHR datasets, facilitating downstream rare disease analysis.

3.3 LLM-Based Text Phenotyping

After obtaining the initial results from SemEHR, we find that it produced many false positive extractions. There are two main issues contributing to this problem. First, the dictionary-based system often inappropriately extracts clinical abbreviations. For example, "PID" can be short as "Primary Immunodeficiency", which is a rare disorder, but can also refer to "Pelvic Inflammatory Disease". Second, SemEHR also incorrectly extracts some rare diseases mentions that are expressed in a hypothetical or negated context, such as "the patient does not have Huntington's disease."

To address these limitations of the dictionary-based approach, we consider to explore the use of LLMs with contextual reasoning capabilities. By leveraging the advanced semantic understanding and contextual information processing of these models, we aim to improve the accuracy of rare disease phenotype extraction from clinical text, reducing the number of false positive identifications.

The task for the LLM can be formulated as a

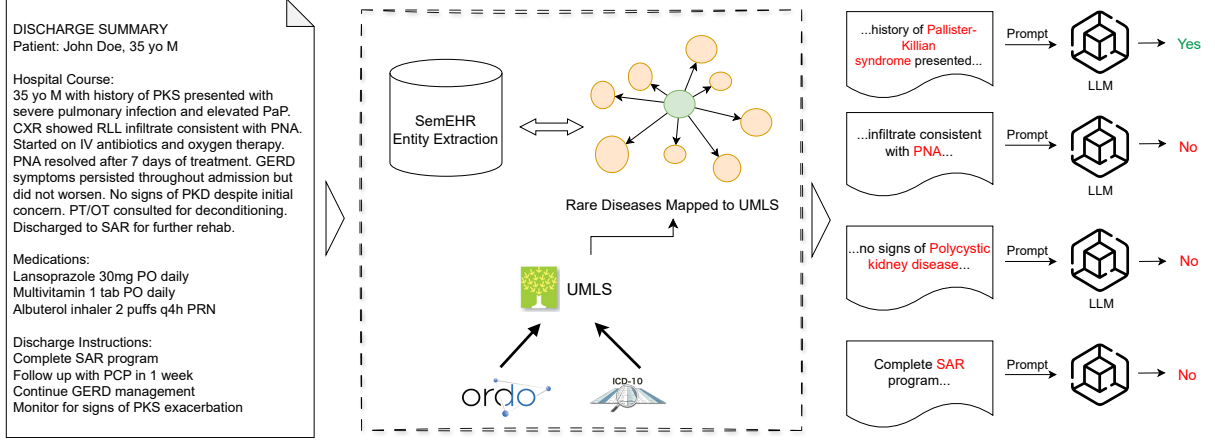


Figure 1: Overview of our work. In the given example report, there are some abbreviations that are mistakenly extracted as rare diseases (eg. PNA: Pneumonia, SAR: Subacute rehabilitation), and also some negated mentioned are extracted (eg. no signs of xxx). We propose leveraging LLMs for enhanced contextual filtering, enabling more precise determinations of relevance and validity within the extracted information.

binary classification problem. Given a rare disease mention m extracted by SemEHR and its surrounding context information c from the clinical text T , the LLM aims to predict the label y :

$$y = f(m, c) \in \{0, 1\}$$

where y represents the predicted label for the rare disease mention. $y = 1$ indicates a true positive (mention refers to the presence of the rare disease). $y = 0$ indicates a false positive (mention does not indicate the presence of the rare disease). f represents the LLM’s classification function that maps the mention and context to a label.

This contextual reasoning step is crucial for improving the accuracy of rare disease phenotype extraction. By analyzing the surrounding context c , the LLM can filter out false positives caused by ambiguities in clinical language, such as abbreviations, negations, and other complexities.

4 Experiments Design

4.1 Dataset

For this study, we use the real-world free-text EHR data, MIMIC-IV, sourced from two in-hospital database systems: a custom hospital wide EHR and an ICU specific clinical information system. Our study mainly focuses on the discharge summaries from this database, which contains 331,794 reports from 145,915 patients (Johnson et al., 2023). Discharge summaries are a critical component of the electronic health record, as they provide a detailed recap of a patient’s hospital stay, including the reasons for admission, the treatments and procedures

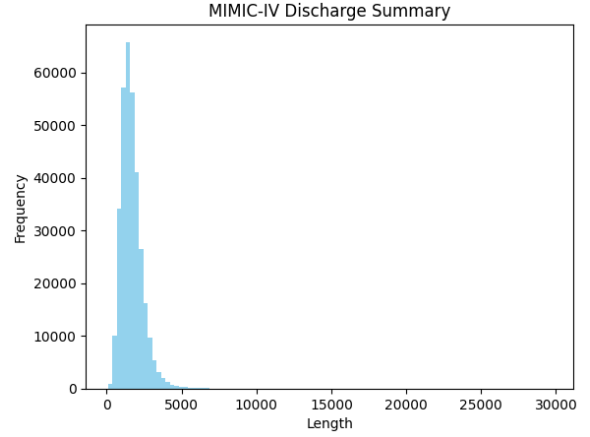


Figure 2: Data Distribution of MIMIC-IV’s discharge summary lengths.

performed, the patient’s progress, and the final diagnosis and recommendations for ongoing care. The narrative structure and detailed clinical descriptions in discharge summaries can offer valuable contextual cues to identify rare disease patients. Figure 1 illustrates the highly skewed distribution of report lengths, with an average of 1,669 words, ranging from a minimum of 87 to a maximum of 29,684 words, which may provide the challenge of long contextual understanding.

4.2 Data Annotation

To evaluate the performance of our rare disease phenotype identification approach, we create a gold standard dataset by randomly selecting 200 discharge summaries from the MIMIC-IV discharge summaries. Two domain experts are asked to man-

ually annotate whether each mention of a rare disease in these summaries represented a true positive (the patient had the rare disease) or a false positive (the mention did not indicate the presence of the rare disease). The annotators are provided with a detailed guideline that includes examples on how to handle hypothetical or negated mentions. Based on the 200 mentions annotated by the two experts, the inter-annotator agreement, measured using Cohen’s kappa, was 0.77, indicating substantial agreement. This gold standard dataset will be used to assess the accuracy of our contextual rare disease phenotype identification model, allowing us to measure its performance in distinguishing true positive rare disease mentions from false positives in real-world clinical text.

4.3 Experiment Setup

First, we implement SemEHR to extract ontology-based rare diseases. Then, we leverage LLMs to perform further contextual reasoning and filter out negative mentions. SemEHR is implemented as the baseline using the default setup. For LLM selection, we focus on models within 8 billion parameters due to computational resource limitations, which often resemble resource-constrained clinical environments. Thus, we choose the latest version of **LLaMA3-8B**¹, **Mistral-7B**² and **Phi3-mini**³. To compare the performance between general domain LLMs and medical fine-tuned LLMs, we select three medical LLMs: **OpenBioLLM**⁴, **BioMistral**⁵, and **Alpacare**⁶, based on their strong performance in various natural language processing tasks. OpenBioLLM-8B builds upon the latest LLaMA3-8B model. It incorporates the DPO dataset and fine-tuning recipe along with a custom diverse medical instruction dataset. Alpaca builds on LLaMA2-7B tuned on medical instruction. BioMistral utilizes Mistral-7B as its foundation model and further pre-trained on PubMed Central. We set the temperature to 0 for LLMs inference to achieve robust and stable responses. For prompt engineering, we experiment with both zero-shot and few-shot prompting, as well as retrieval augmented generation, explor-

¹<https://huggingface.co/meta-llama/Meta-Llama-3-8B>

²<https://huggingface.co/mistralai/Mistral-7B-Instruct-v0.2>

³<https://huggingface.co/microsoft/Phi-3-mini-128k-instruct>

⁴<https://huggingface.co/aaditya/Llama3-OpenBioLLM-8B>

⁵<https://huggingface.co/BioMistral/BioMistral-7B>

⁶<https://huggingface.co/xz97/AlpacaCare-llama2-7b>

	Size	F1	P	R
SemEHR(<i>baseline</i>)		0.4866	0.3415	0.8458
<i>Zero-Shot</i>				
+AlpaCare	7B	0.5083	0.4083	0.6732
+BioMistral	7B	0.5219	0.4151	0.7028
+OpenBioLLM	8B	0.5568	0.4444	0.7453
+Mistral	7B	0.5743	0.4949	0.6841
+LLaMA3	8B	0.6834	0.6023	0.7897
+Phi3-mini	3.8B	0.6921	0.6197	0.7836
<i>Few-Shot</i>				
+AlpaCare	7B	0.5448	0.4839	0.6232
+Mistral	7B	0.5891	0.5497	0.6346
+BioMistral	7B	0.5896	0.5110	0.6968
+OpenBioLLM	8B	0.6726	0.6908	0.6553
+Phi3-mini	3.8B	0.7484	0.6900	0.8176
+LLaMA3	8B	0.7492	0.7071	0.7966
<i>RAG</i>				
+AlpaCare	7B	0.5006	0.3964	0.6791
+BioMistral	7B	0.5296	0.4222	0.7103
+OpenBioLLM	8B	0.5547	0.4426	0.7427
+Mistral	7B	0.5647	0.4794	0.6871
+LLaMA3	8B	0.6830	0.6011	0.7907
+Phi3-mini	3.8B	0.6966	0.6221	0.7913

Table 1: Overall model performance for rare disease identification. B: Billion. P: Precision. R: Recall. We report results with 100 context window size as it is the best one shown in Figure 4.

ing the effectiveness of different prompting strategies in the context of rare disease identification.

To investigate the impact of contextual information on the LLMs’ ability to accurately identify rare diseases, we vary the amount of surrounding text provided to the models, starting with the full discharge summary paragraph and gradually reducing the context to shorter lengths. This approach allows us to assess the models’ sensitivity to contextual cues and determine the optimal balance between computational efficiency and performance. By systematically evaluating the LLMs’ performance across different context window sizes, we aim to identify the most effective strategy for incorporating contextual information in the rare disease identification task, considering both accuracy and computational feasibility in resource-constrained clinical settings.

5 Results

Overall Performance. Table 1 presents the results from different approaches, evaluated using three key metrics: F1 score, Precision, and Recall. The baseline model, SemEHR, achieves an F1 score of 0.4866 with a low precision score of 0.3415, suggesting a significant number of false positive predictions. In other words, many of the rare disease phenotypes identified by SemEHR

are not actually present in the clinical text. To further filter SemEHR results, we employ different LLMs. For zero-shot prompting, Phi3-mini achieves the best F1 score of 0.6921, followed closely by LLaMA3. AlpaCare demonstrates the least improvement in precision.

Few-Shot Prompting. Regarding few-shot prompting, we experiment with 1 to 10 shots, randomly selecting examples (ensuring no overlap between the examples chosen for few-shot and the test dataset). The best performance for each model is reported in Table 1. All models show improvements in F1 score ranging from 0.01 to 0.12 compared to zero-shot prompting. OpenBioLLM exhibits the most significant improvement of 0.1158, while Mistral shows the least improvement with a 0.0148 increment.

Moreover, Figure 3 demonstrates the impact of the number of few-shot examples on the performance of different LLMs. The plot also reveals that increasing the number of few-shot examples generally leads to improved performance for all LLMs, as indicated by the upward trend in the F1 scores. This observation highlights the effectiveness of few-shot learning in enhancing the models' ability to accurately identify rare diseases in clinical text. By providing a small set of representative examples, the LLMs can better adapt to the specific task and capture the relevant patterns and characteristics associated with rare disease mentions. Among the LLMs evaluated, LLaMA3 demonstrates the best performance across different numbers of few-shot examples, followed closely by Mistral and Phi3-mini. These models show a consistent improvement in F1 score as the number of few-shot examples increases, suggesting their strong ability to leverage the additional information provided by the examples to refine their predictions.

Retrieval Augmented Generation. Retrieval augmented generation (RAG) has emerged as a promising approach to enhance the performance of LLMs on tasks requiring knowledge beyond their training data. This technique leverages external knowledge sources to provide context and improve the LLMs' ability to understand and respond to prompts. We further investigate the influence of incorporating retrieved knowledge or information into prompts for LLMs. For each disease mention, we extract the corresponding definition from UMLS to enhance explanation of the rare disease and integrate it into the prompts. This aims

to evaluate whether the model leverages the new knowledge alongside its training data to generate improved responses. Our findings reveal that Phi3-mini and BioMistral models achieve marginally higher F1 scores compared to the zero-shot setting, but still underperformed compared to few-shot prompting. Other models fail to benefit from incorporating retrieved knowledge into prompts. This suggests that the models may possess sufficient intrinsic knowledge about rare diseases, and that few-shot examples might be more effective in facilitating comprehension than related knowledge.

Medical LLMs vs General LLMs. Interestingly, the medical fine-tuned LLMs, such as OpenBioLLM, BioMistral, and AlpaCare perform worse than the general domain LLMs, highlighting the need for future efforts to improve the fine-tuning process by incorporating medical knowledge more effectively. One of the key challenges encountered with these LLMs is their lack of robustness and limited understanding of the given instructions and clinical reports. This finding underscores the importance of careful evaluation and adaptation of LLMs in the medical domain, as generic medical fine-tuning alone may not guarantee optimal performance in tasks such as rare disease identification. Further research is necessary to develop more sophisticated fine-tuning strategies that can better leverage medical knowledge to enhance the accuracy and reliability of LLMs in clinical applications.

The Impact of Context Length. Figure 4 illustrates the impact of context length on the performance of the LLMs in the task of rare disease identification. The context length is systematically varied from 100 to 8000 tokens and finally to the full length of the clinical report. A key observation from the figure is that as the context length increases, the performance of the models generally decreases, as indicated by the downward trend in the plot. This suggests that smaller context lengths may be more effective for LLMs to make accurate inferences about the presence of rare diseases in clinical text. The models appear to perform better when focusing on more localized context, such as the most relevant sections of the clinical report, rather than considering the entire document. This finding highlights the importance of selecting an appropriate context window size to optimize the performance of LLMs in rare disease identification tasks and strikes a balance between providing

sufficient contextual information and avoiding the inclusion of irrelevant or potentially confounding details.

Furthermore, the results indicate that the current state-of-the-art LLMs still have difficulties in reasoning long sequences. Despite their impressive capabilities in various natural language processing tasks, the contextual reasoning ability of these models is not yet robust enough to effectively handle the full length of clinical reports. This observation underscores the need for further research and development of LLMs to improve their ability to reason over longer contexts and capture relevant information from comprehensive clinical narratives.

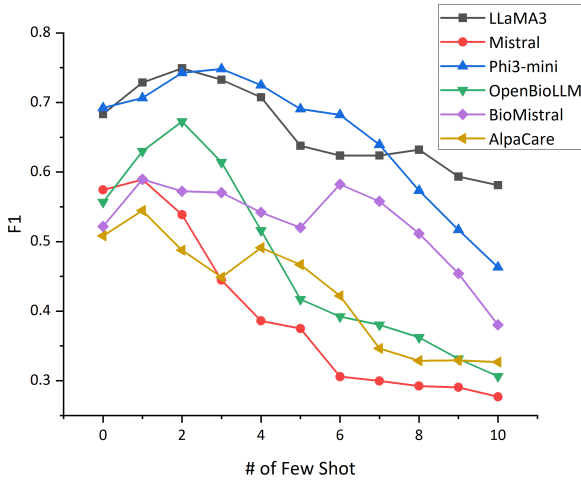


Figure 3: Few-shot prompting performance (F1) of LLMs.

Analysis on the Full Dataset. Using the best-performing approach, we conduct automatic rare disease identification on the full dataset, which consists of over 331,000 discharge summaries with 145,915 patients. In total 1,143 out of 4,064 rare disease are found in the full cohort, affecting a total of 24,593 individuals. Interestingly, 495 of these diseases are not previously coded in the structured data (i.e. not shown in the diagnostic ICD table) but are found in the patients’ discharge summaries, highlighting the potential of NLP techniques to uncover previously unrecognized patients.

In addition to that, our analysis reveals that 337 rare diseases have a higher number of patients identified from free-text EHRs. This finding suggests the presence of potentially undiagnosed individuals with rare diseases, emphasizing the importance of comprehensive phenotyping in identifying patients

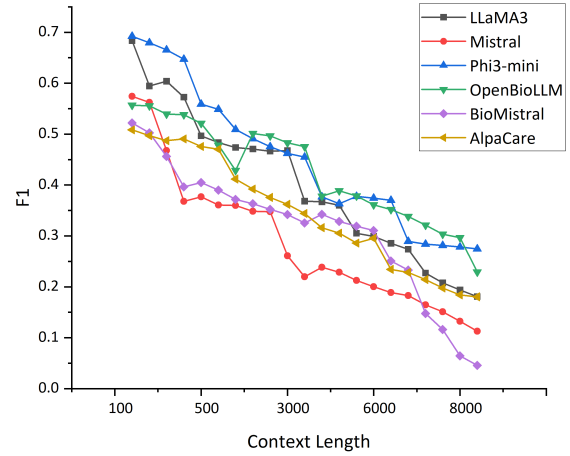


Figure 4: Impact of context length on the performance (F1) of LLMs. The context window size is set from 100 words to 8000 words until the maximum length of the discharge summaries.

who may have been missed by traditional coding methods.

To illustrate the significance of these findings, Figure 5 showcases a selection of rare diseases that are omitted from the coded data but detected through free-text EHRs. These examples underscore the utility of applying advanced text mining techniques to unstructured clinical narratives, as they can provide valuable insights into rare disease epidemiology and facilitate the identification of patients who may benefit from targeted interventions and specialized care.

Our results demonstrate the power of combining large-scale clinical datasets with sophisticated NLP methods to improve the detection and characterization of rare disease phenotypes. The results support previous findings in [Dong et al. \(2023\)](#) and [Ford et al. \(2016\)](#), in favour of using unstructured texts in the clinical notes and combining them with structured coded data, for disease identification. By leveraging the wealth of information contained within unstructured clinical text, we can enhance our understanding of rare diseases, identify patients who may have gone undiagnosed, and ultimately improve outcomes for this often-overlooked patient population.

6 Conclusion

In conclusion, this study presents a novel hybrid approach that combines dictionary-based NLP tools with LLMs to improve rare disease identification

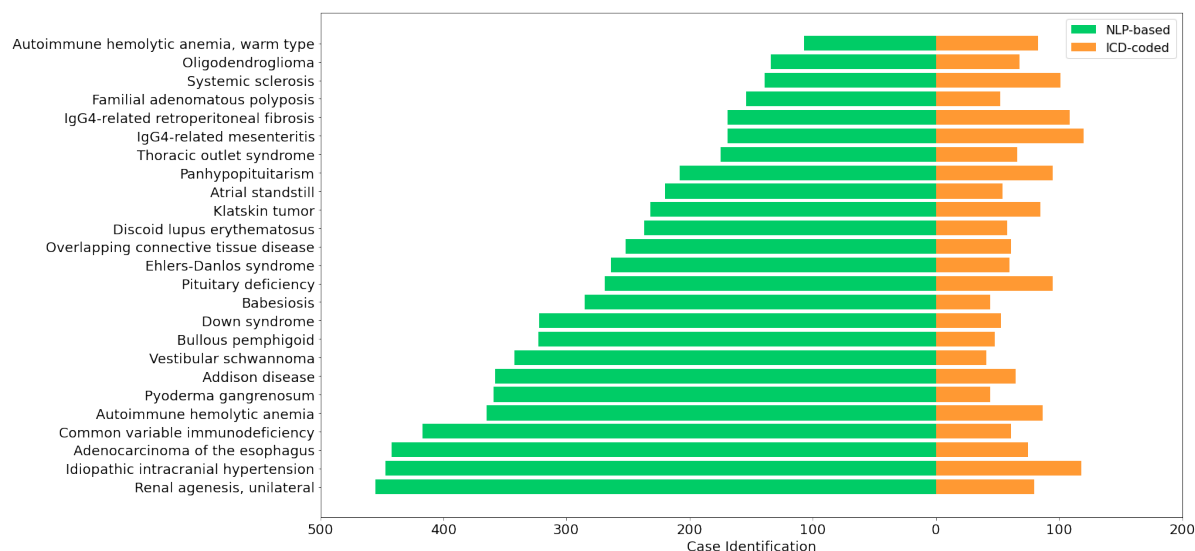


Figure 5: Case identification of rare diseases identified by NLP-based (free-text) and ICD-based (structured) data.

from unstructured clinical reports. By leveraging the strengths of both techniques, the proposed method demonstrates superior performance compared to traditional NLP systems and LLMs. Our experiments explore different attempts of zero-shot and few-shot prompting, RAG and the impact of context length on the performance. In general LLaMA3 and Phi3-mini achieve the best F1 score on the rare disease identification. Furthermore, our analysis suggests the ability to identify potential rare disease cases not yet documented in structured records. This finding underscores the potential of our method to uncover hidden cases, facilitating earlier diagnoses and ultimately improving patient outcomes and treatment development.

Limitation While our approach demonstrates promise for rare disease identification, further advancements are necessary to maximize its effectiveness and integrate it seamlessly into medical practice.

The effectiveness of our approach relies on the quality of ontology matching among UMLS, ICD-10, and ORDO. Some of the mappings are not accurate, for example, "Congenital pulmonary airway malformation" from UMLS is mapped to "Q330 Congenital cystic lung" in ICD-10. As medical terminologists regularly update these mappings with the support of ontology mapping tools, the method's performance is expected to improve over time. Additionally, our analysis primarily focuses on comparing the case identification of rare diseases identified by NLP-based(free-text) and ICD-based(structured) data. There may be overlapping

cases between the two approaches, future analysis on this regard maybe helpful.

Another area for improvement lies in enhancing the accuracy of existing models, which currently represent the most valuable tools for medical assistance and diagnosis. Here, the Retrieval-Augmented Generation (RAG) approach holds significant potential. Continued exploration of RAG techniques can determine whether even more valuable information can be gleaned from external knowledge sources to refine the models' decision-making capabilities. This could involve investigating novel methods for information extraction and integration, potentially incorporating structured knowledge bases alongside unstructured clinical text.

Ethics Statement

This work used the de-identified clinical notes in MIMIC-IV. We completed the Collaborative Institutional Training Initiative (CITI) Program's "Data or Specimens Only Research" course⁷ and signed the data use agreement to get access to the data. We strictly followed the guidelines and only used locally hosted LLMs with the data.

References

Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altschmidt, Sam Altman,

⁷<https://physionet.org/content/shareclefehealth2013/view-required-trainings/1.0/#1>

- Shyamal Anadkat, et al. 2023. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*.
- Olivier Bodenreider. 2004. The unified medical language system (umls): integrating biomedical terminology. *Nucleic acids research*, 32(suppl_1):D267–D270.
- Hang Dong, Víctor Suárez-Paniagua, Huayu Zhang, Minhong Wang, Arlene Casey, Emma Davidson, Jiaoyan Chen, Beatrice Alex, William Whiteley, and Honghan Wu. 2023. Ontology-driven and weakly supervised rare disease identification from clinical notes. *BMC Medical Informatics and Decision Making*, 23(1):86.
- Elizabeth Ford, John A Carroll, Helen E Smith, Donia Scott, and Jackie A Cassell. 2016. Extracting information from the text of electronic medical records to improve case detection: a systematic review. *Journal of the American Medical Informatics Association*, 23(5):1007–1015.
- Sebastian Gehrmann, Franck Dernoncourt, Yeran Li, Eric T Carlson, Joy T Wu, Jonathan Welt, John Foote Jr, Edward T Moseley, David W Grant, Patrick D Tyler, et al. 2018. Comparing deep learning and concept extraction based methods for patient phenotyping from clinical narratives. *PloS one*, 13(2):e0192360.
- Robert C Griggs, Mark Batshaw, Mary Dunkle, Rashmi Gopal-Srivastava, Edward Kaye, Jeffrey Krischer, Tan Nguyen, Kathleen Paulus, Peter A Merkel, et al. 2009. Clinical research for rare disease: opportunities, challenges, and solutions. *Molecular genetics and metabolism*, 96(1):20–26.
- Ada Hamosh, Alan F Scott, Joanna Amberger, David Valle, and Victor A McKusick. 2000. Online mendelian inheritance in man (omim). *Human mutation*, 15(1):57–61.
- Alistair EW Johnson, Lucas Bulgarelli, Lu Shen, Alvin Gayles, Ayad Shammout, Steven Horng, Tom J Pollard, Sicheng Hao, Benjamin Moody, Brian Gow, et al. 2023. MIMIC-IV, a freely accessible electronic health record dataset. *Scientific data*, 10(1):1.
- Jacqueline C Kirby, Peter Speltz, Luke V Rasmussen, Melissa Basford, Omri Gottesman, Peggy L Peisig, Jennifer A Pacheco, Gerard Tromp, Jyotishman Pathak, David S Carrell, et al. 2016. PheKB: a catalog and workflow for creating electronic phenotype algorithms for transportability. *Journal of the American Medical Informatics Association*, 23(6):1046–1052.
- Zeljko Kraljevic, Daniel Bean, Aurelie Mascio, Lukasz Roguski, Amos Folarin, Angus Roberts, Rebecca Bendayan, and Richard Dobson. 2019. MedCAT—medical concept annotation tool. *arXiv preprint arXiv:1912.10166*.
- Jinhyuk Lee, Wonjin Yoon, Sungdong Kim, Donghyeon Kim, Sunkyu Kim, Chan Ho So, and Jaewoo Kang. 2020. BioBERT: a pre-trained biomedical language representation model for biomedical text mining. *Bioinformatics*, 36(4):1234–1240.
- Yikuan Li, Shishir Rao, José Roberto Ayala Solares, Abdelaali Hassaine, Rema Ramakrishnan, Dexter Canoy, Yajie Zhu, Kazem Rahimi, and Gholamreza Salimi-Khorshidi. 2020. BehrT: transformer for electronic health records. *Scientific reports*, 10(1):7155.
- David Oniani, Jordan Hilsman, Hang Dong, Fengyi Gao, Shiven Verma, and Yanshan Wang. 2023. Large language models vote: Prompting for rare disease identification. *arXiv preprint arXiv:2308.12890*.
- World Health Organization. 2004. *International Statistical Classification of Diseases and related health problems: Alphabetical index*, volume 3. World Health Organization.
- World Health Organization et al. 1988. International classification of diseases—ninth revision (ICD-9). *Weekly Epidemiological Record= Relevé épidémiologique hebdomadaire*, 63(45):343–344.
- Laila Rasmy, Yang Xiang, Ziqian Xie, Cui Tao, and Degui Zhi. 2021. Med-BERT: pretrained contextualized embeddings on large-scale structured electronic health records for disease prediction. *NPJ digital medicine*, 4(1):86.
- Peter N Robinson, Sebastian Köhler, Sebastian Bauer, Dominik Seelow, Denise Horn, and Stefan Mundlos. 2008. The human phenotype ontology: a tool for annotating and analyzing human hereditary disease. *The American Journal of Human Genetics*, 83(5):610–615.
- Guergana K Savova, James J Masanz, Philip V Ogren, Jiaping Zheng, Sunghwan Sohn, Karin C Kipper-Schuler, and Christopher G Chute. 2010. Mayo clinical text analysis and knowledge extraction system (ctakes): architecture, component evaluation and applications. *Journal of the American Medical Informatics Association*, 17(5):507–513.
- Arrigo Schieppati, Jan-Inge Henter, Erica Daina, and Anita Aperia. 2008. Why rare diseases are an important medical and social issue. *The Lancet*, 371(9629):2039–2041.
- Wei Shen, Jianyong Wang, and Jiawei Han. 2014. Entity linking with a knowledge base: Issues, techniques, and solutions. *IEEE Transactions on Knowledge and Data Engineering*, 27(2):443–460.
- James K Stoller. 2018. The challenge of rare diseases. *Chest*, 153(6):1309–1314.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. 2023. LLaMA 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*.

- Cunxiang Wang, Xiaoze Liu, Yuanhao Yue, Xian-gru Tang, Tianhang Zhang, Cheng Jiayang, Yunzhi Yao, Wenyang Gao, Xuming Hu, Zehan Qi, et al. 2023. Survey on factuality in large language models: Knowledge, retrieval and domain-specificity. *arXiv preprint arXiv:2310.07521*.
- Steffanie S Weinreich, R Mangon, JJ Sikkens, ME En Teeuw, and MC Cornel. 2008. Orphanet: a european database for rare diseases. *Nederlands tijdschrift voor geneeskunde*, 152(9):518–519.
- Honghan Wu, Giulia Toti, Katherine I Morley, Zina M Ibrahim, Amos Folarin, Richard Jackson, Ismail Kartoglu, Asha Agrawal, Clive Stringer, Darren Gale, et al. 2018. Semehr: A general-purpose semantic search system to surface semantic data from clinical notes for tailored care, trial recruitment, and clinical research. *Journal of the American Medical Informatics Association*, 25(5):530–537.
- Sheng Yu, Yumeng Ma, Jessica Gronsbell, Tianrun Cai, Ashwin N Ananthakrishnan, Vivian S Gainer, Susanne E Churchill, Peter Szolovits, Shawn N Murphy, Isaac S Kohane, et al. 2018. Enabling phenotypic big data with phenorm. *Journal of the American Medical Informatics Association*, 25(1):54–60.

A Appendix

Zero-Shot	<p>Given a text, the start and end indices of a mention from the text, and the mention itself, determine whether the mention is a true rare disease mention or not. Return "yes" if it is a true mention, "no" if not a true mention. Please only answer yes or no in your response.</p> <p>### Text: {text}. Mention: {mention}. Start: {start_index}. End: {end_index}.</p> <p>### Output:</p>
Few-Shot	<p>Given a text, the start and end indices of a mention from the text, and the mention itself, determine whether the mention is a true rare disease mention or not. Return "yes" if it is a true mention, "no" if not a true mention. Please only answer yes or no in your response.</p> <p>Here are some examples: {examples}.</p> <p>### Text: {text}. Mention: {mention}. Start: {start_index}. End: {end_index}.</p> <p>### Output:</p>
RAG	<p>Given a text, the start and end indices of a mention from the text, and the mention itself, determine whether the mention is a true rare disease mention or not. Return "yes" if it is a true mention, "no" if not a true mention. Please only answer yes or no in your response.</p> <p>### Text: {text}. Mention: {mention}. Start: {start_index}. End: {end_index}.</p> <p>Here are some extra information you can refer to: Preferred name of this mention: {preferred_name}. Definition: {definition}.</p> <p>### Output:</p>

Table 2: Example of prompt using LLMs for rare disease identification.