

DYNAMIC DATA SAMPLER FOR CROSS-LANGUAGE TRANSFER LEARNING IN LARGE LANGUAGE MODELS

Yudong Li¹ Yuhao Feng² Wen Zhou³ Zhe Zhao² Linlin Shen^{1*} Cheng Hou² Xianxu Hou⁴

¹ School of Computer Science and Software Engineering, Shenzhen University

²Tencent AI Lab

³ LIESMARS, Wuhan University

⁴School of AI and Advanced Computing, Xi'an Jiaotong-Liverpool

ABSTRACT

Large Language Models (LLMs) have gained significant attention in the field of natural language processing (NLP) due to their wide range of applications. However, training LLMs for languages other than English poses significant challenges, due to the difficulty in acquiring large-scale corpus and the requisite computing resources. In this paper, we propose ChatFlow, a cross-language transfer-based LLM, to address these challenges and train large Chinese language models in a cost-effective manner. We employ a mix of Chinese, English, and parallel corpus to continuously train the LLaMA2 model, aiming to align cross-language representations and facilitate the knowledge transfer specifically to the Chinese language model. In addition, we use a dynamic data sampler to progressively transition the model from unsupervised pre-training to supervised fine-tuning. Experimental results demonstrate that our approach accelerates model convergence and achieves superior performance. We evaluate ChatFlow on popular Chinese and English benchmarks, the results indicate that it outperforms other Chinese models post-trained on LLaMA-2-7B.

Index Terms— Large language model, cross-language, knowledge transfer

1. INTRODUCTION

Large Language Models (LLMs) have demonstrated significant application potential and become a research hotspot. At present, there are many publicly available models that provide robust baselines, which promote the research of LLMs within the NLP community. Most of these models benefit from the naturally high-quality English corpus available on the Internet. For instance, models such as LLaMA1[1], Falcon[2] and LLaMA2[3], are pre-trained on large-scale corpus (exceeding 1000B tokens) and have achieved state-of-the-art performance.

However, training LLMs in languages other than English presents great challenges. For example, by August 2023, English text accounted for 59.3% of the content on the Internet, while Chinese made up only 1.4%¹. This significant disparity makes it particularly difficult to train LLMs of comparable scale and quality in the Chinese language. The existing Chinese public models like ChatGLM[4], Baichuan² and Qwen³ are typically pre-trained on their private data without disclosing training details, which poses challenges for reproducibility. In addition, training such models requires significant engineering capabilities across multiple stages including pre-training, supervised fine-tuning (SFT), reinforcement learning from human feedback (RLHF), and requires substantial computing resources and manpower. This overhead makes great challenges to train LLMs from scratch for most researchers.

To alleviate these issues and explore a cost-effective method for constructing large Chinese language models, we propose ChatFlow, a cross-language transfer-based LLM. We conduct continuous training on an English-specific language model using a mix of Chinese, English and parallel corpus to align the cross-language representation, which allows for transferring the English model’s inherent knowledge to Chinese. Moreover, inspired by curriculum learning[5], we propose a dynamic data sampler that progressively transition the model from unsupervised pre-training to supervised fine-tuning using training data with dynamic distribution. In contrast to existing methods that separate pre-training and fine-tuning stages, our approach provides a smoother transition for model training, avoiding abrupt changes in data distribution between different stages.

We train our proposed ChatFlow on approximately 50GB data based on the LLaMA2-7B foundation model. We find that our model can readily learn Chinese knowledge while retaining its original English capability. We evaluate ChatFlow on popular Chinese and English benchmarks. In automatic

¹https://w3techs.com/technologies/overview/content_language

²<https://github.com/baichuan-inc/Baichuan-13B>

³<https://github.com/QwenLM/Qwen-7B>

*Corresponding author: llshen@szu.edu.cn

evaluations including MMLU[6], C-Eval[7], CMMUL[8] and GAOKAO[9], compared with other Chinese models post-trained on LLaMA-2-7B, our model achieves superior results. In the human-based SuperCLUE[10] benchmark, our model ranks 5-th among 7B-scale models. Notably, unlike other Chinese-native models, ChatFlow is trained from an English foundation model and requires less Chinese data. Furthermore, we only used publicly available data for training and have released both the code and weights⁴ for reproducibility.

Our contributions are summarized as follows:

- We propose ChatFlow, a novel transfer-based large language model that enables cost-effective training of cross-language LLMs.
- We introduce a dynamic data sampler, which removes the explicit gap between pre-training and SFT.
- We train our ChatFlow based on LLaMA-7B to boost its Chinese performance, and experimental results demonstrate its superiority over other methods.

2. APPROACH

2.1. Transfer Learning with Dynamic Data Sampler

The conventional approach of large language model training typically involves separate stages of unsupervised pre-training and supervised fine-tuning (SFT). This design is based on the fact that the model acquires general knowledge during pre-training, while SFT focuses on transferring this knowledge to downstream tasks by learning the format of user interactions. In previous practices, the sudden shift in data distribution during the SFT stage could cause the model to confuse previously learned knowledge. To mitigate this issue, unsupervised data are mixed with instructions to balance the distribution[2].

However, in training ChatFlow, both cross-language transfer and downstream task transfer take place concurrently, which amplifies the challenge of maintaining stable transfer learning. In this work, inspired by curriculum learning[5], we employ a dynamic data sampler to facilitate a smoother transition in model training. For ChatFlow training, this approach transitions the model from English pre-training to bilingual (English and Chinese) pre-training and instruction-tuning in a stepwise manner, thereby speeding up convergence and improving performance.

Specifically, we utilize a sampler to construct training batches. For each task, the function $\gamma(t)$ computes the sampling rate for the t -th sample. Initially, the sampler applies a higher proportion of English and parallel corpus, mirroring the distribution of the LLaMA’s original pre-training. As the training progresses, the sampler linearly increases the proportion of Chinese and instruction data. This transition is

Table 1. The properties of the mixed datasets used in the transfer learning and their hyperparameters. Lang: Language; inst: instruction.

Dataset	Disc Size	Lang.	Type	α	β
RefinedWeb	10 GB	en	corpus	0.60	0.15
CLUECorpus	13 GB	zh	corpus	0.05	0.50
WuDao	10 GB				
CSL	1.5 GB				
ParaCrawl v9	2.6 GB	en-zh	parallel	0.25	0
WikiMatri	0.6 GB				
UltraChat	5 GB	en	inst.	0.05	0.10
FLAN	1.7 GB				
BELLE	4.6 GB	zh	inst.	0	0.20
COIG	4.5 GB				
GitHub	2 GB	multi	code	0.05	0.05

completed within $T_{grow} = 5M$ samples, indicating a shift in training from English to Chinese, and from unsupervised tasks to instruction learning. For the remaining training samples, a fixed distribution is used for consistent learning and improvement throughout the later stages of training. The function $\gamma(t)$ is defined as follows:

$$\gamma(t) = \begin{cases} \alpha + \frac{\beta - \alpha}{T_{grow}} \cdot t & t \leq T_{grow} \\ \beta & t > T_{grow} \end{cases}$$

where α represents the initial weight, β is the final weight. We empirically set these parameters based on previous curriculum learning methods’ experience. The settings for each task are presented in Table 1.

2.2. Training Data

Our training data is composed of several data sources, including unsupervised corpus, parallel corpus, and instruction data in Chinese and English language. We use about 50GB data containing 8B tokens. The data source details are as follows:

Parallel corpus. The Chinese-English parallel corpus bridges Chinese and English knowledge representation within the model. By leveraging the foundation model’s built-in English ability, parallel corpus accelerates the model’s learning of Chinese knowledge. We use ParaCrawl v9 [11] and WikiMatri [12] to align sentence- and word-level Chinese-English representations.

Unsupervised corpus. Our unsupervised data includes both Chinese and English corpus, where Chinese data is used to provide Chinese world knowledge, and English data is used to balance the training distribution to avoid forgetting of existing knowledge. The Chinese corpus contains CLUECorpus[13], CSL[14], and a subset of WuDao dataset⁵

⁴<https://github.com/CVI-SZU/Linly>

⁵<https://github.com/BAAI-WuDao/Data>

Table 2. A comparison of ChatFlow with LLaMA2-Chat and other Chinese models post-trained on LLaMA2.

Model	MMLU	C-Eval	CMMLU	GAOKAO
Meta-LLaMA2-Chat	45.3	31.7	32.1	27.3
FlagAlpha-LLaMA2	46.1	33.3	32.8	28.5
LinkSoul-LLaMA2-sft	47.4	34.5	36.5	30.2
HFL-Alpaca2	43.0	<u>39.9</u>	<u>39.4</u>	<u>36.2</u>
wzhu-LLaMA2-sft	44.7	33.6	32.9	29.4
ChatFlow (ours)	<u>46.8</u>	43.1	40.2	40.7

filtered by URL domain. The English corpus contains a subset of RefinedWeb[2]. The GitHub code is obtained from SlimPajama⁶.

Instruction data. The model acquires the ability to interact with users and enhances its knowledge by learning from instructional data. We combine instruction datasets from different sources and languages, including self-instructed data such as BELLE[15] and UltraChat[16]; supervised data and prompts such as FLAN[17], COIG[18].

2.3. Prompt Format and Objective

We train the ChatFlow model using a consistent language model objective, where unsupervised data and instruction data are distinguished by a specific format. For each training instance, we directly use the unsupervised data for training. The parallel corpus, on the other hand, is spliced by line breaks and then used as a training sample. As for the instruction data, we encapsulate it within a prompt template. The prompt template follows the Alpaca format⁷ and is simplified. Multiple rounds of dialogue are separated by “User” and “Bot” symbols. The following is an example of a 2-round instruction:

User: {question-1} Bot: {answer-1} ### Instruction: {question-2} ### Response: {answer-2}

We splice (or truncate) each instance into fixed-length sequences using the full-sentence strategy. Given a sequence of tokens, denoted as $\{t_1, \dots, t_n\}$ and a model with trainable parameters θ , we use the language modeling objective to maximize the following likelihood:

$$L(\theta) = \sum_i \log P(t_i | t_1, \dots, t_{i-1}; \theta) \quad (1)$$

3. EXPERIMENT

3.1. Training ChatFlow

We initialize our model with LLaMA2-7B weights. Since LLaMA was originally designed for the English language,

⁶<https://huggingface.co/datasets/cerebras/SlimPajama-627B>

⁷https://github.com/tatsu-lab/stanford_alpaca

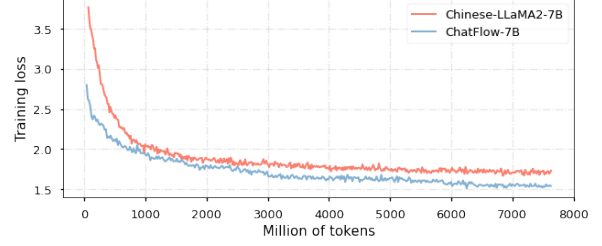


Fig. 1. Training loss over the number of trained tokens in the ablation study.

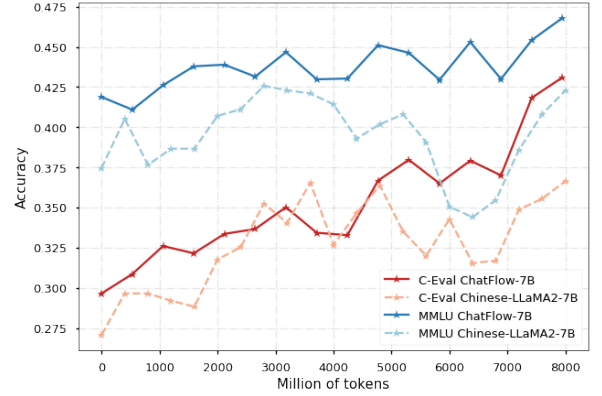


Fig. 2. Evaluation metrics over trained tokens in the ablation study. The model’s performance on the English evaluation MMLU is shown on the blue line, while its performance on the Chinese evaluation C-Eval is shown on the red line.

there are only 700 Chinese characters in its vocabulary. We extend the vocabulary with 8,701 Chinese characters and 62 symbols. We initialize the extended embedding and output matrices with the mean values of tokens corresponding to these words in the original vocabulary.

We train ChatFlow on 16*A100 GPUs for two weeks, using TencentPretrain framework[19] in bfloat16 format. We basically follow Meta’s training hyperparameters. The sequence length is set to 2048, the batch size is 512, and gradient accumulation is used.

3.2. Main Results

We evaluate our model on different benchmarks including MMLU[6] for English understanding, C-Eval[7] for comprehensive Chinese understanding, CMMLU[8] for Chinese knowledge and reasoning and GAOKAO[9] for Chinese college entrance examination questions. All evaluations are conducted under 3-shot setting. In Table 2, we compare our model with other LLaMA2-based Chinese models. It can be seen that our model outperforms other models in Chinese and retains its English proficiency after post-training in Chinese. On the other hand, ChatFlow also reflects the efficiency of

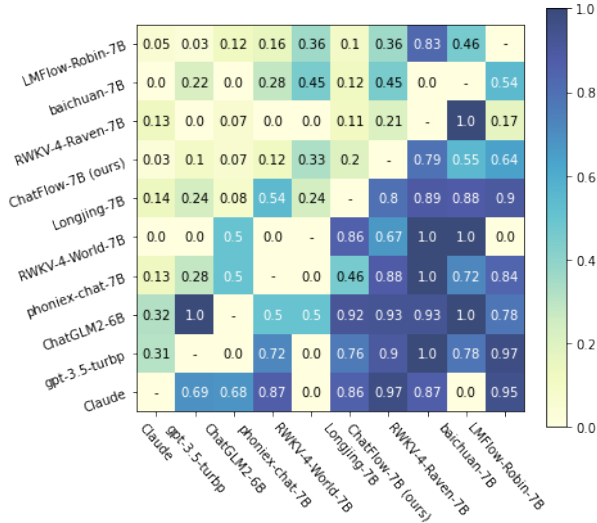


Fig. 3. Win rate for all models in non-tie matches. ChatFlow ranks 5th among the 7B models.

transfer learning. For example, compared with the previous SOTA model HFL-Alpaca2 which uses 120GB corpus for training, ChatFlow only uses less than half of its data.

3.3. Human Evaluation

We also conduct a user-based study to evaluate ChatFlow, utilizing SuperCLUE [10], an anonymous competition platform designed for large Chinese models. Users are asked to chat with two randomly selected models, choosing the one they deem superior. The platform has collected 9.9k user votes, with model scores and rankings determined by the Elo scoring, which is a widely used rating system in chess and other competitive games.

We compare ChatFlow with state-of-the-art commercial models (including Claude and gpt-3.5-turbo), as well as other models with similar parameter levels. The winning rate and detailed comparison are shown in Figure 3 and Table 3. It can be seen that ChatFlow ranks 5th among the 7B models. Notably, ChatGLM2, RWKV-Word and Longjing are trained from scratch in both Chinese and English. Phoenix, on the other hand, is fine-tuned based on the BLOOMZ multilingual foundation model. Unique among these, ChatFlow is the only model based on an English model and acquiring Chinese language capabilities through transfer learning. Despite these achievements, when compared with recent popular commercial models, our model still has a large gap, the winning rate is only about 10%, which leaves room for future improvement.

3.4. Ablation Study

We conduct an ablation study to analyze the impact of our proposed dynamic data sampler. For the baseline, we train a

Table 3. Comparing Chatflow to other models on human evaluation. An asterisk “*” indicates that the model was trained from scratch. Avail: Model availability, “API” denotes that the model can only be called through API, “Weights” denotes that the model weights are released, while the training data and code are not available.

Model	Architecture	Data Size	Avail.	Elo
Claude	unk.	unk.	API	1215
gpt-3.5-turbo	GPT3	unk.	API	1189
ChatGLM2-6B	GLM	1.4TB*	Weights	1104
phoenix-chat-7B	BLOOMZ	1.5GB	Full	1065
RWKV-4-World-7B	RWKV	800GB*	Full	1031
Longjing-7B	T5	unk.	Weights	979
ChatFlow (ours)	LLaMA	50GB	Full	868
RWKV-4-Raven-7B	RWKV	800GB*	Full	852
baichuan-7B	LLaMA	1.2T*	Weights	816
LMFlow-Robin-7B	LLaMA	500MB	Full	658

naive Chinese-LLaMA2, utilizing the same data and hyper-parameters as those used in ChatFlow, but without the the dynamic data sampler. We track the metrics throughout the training process. Figure 1 illustrates the convergence of the training loss, indicating that ChatFlow demonstrates a lower loss at the beginning of the training and converges more swiftly. In Figure 2, we evaluate the model’s performance on the MMLU and C-Eval benchmarks. The results reveal that at each training stage, the model with the dynamic data sampler consistently achieves more stable and superior scores.

4. CONCLUSION

In this paper, we propose ChatFlow to address the challenge of training cross-language LLMs in a cost-effective manner. By leveraging a mix of Chinese, English, and parallel corpora, we align cross-language representations and facilitate knowledge transfer to the Chinese language model. In addition, we introduce a dynamic data sampler to train ChatFlow with a smooth transition from unsupervised pre-training to supervised fine-tuning. We train ChatFlow using our proposed protocol, it serves as a reproducible baseline and valuable reference for transferring to other languages. We have publicly made our code and weights available to ensure reproducibility and encourage further research.

5. ACKNOWLEDGEMENT

This work was supported by the National Natural Science Foundation of China under Grant 82261138629, 62206180; Guangdong Basic and Applied Basic Research Foundation under Grant 2023A1515010688, 2022A1515011018; Shenzhen Municipal Science and Technology Innovation Council under Grant JCYJ20220531101412030 and XJTLU RDF under Grant RDF-23-01-053.

6. REFERENCES

- [1] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al., “Llama: Open and efficient foundation language models,” *arXiv preprint arXiv:2302.13971*, 2023.
- [2] Guilherme Penedo, Quentin Malartic, Daniel Hesslow, Ruxandra Cojocaru, Alessandro Cappelli, Hamza Alobeidli, Baptiste Pannier, Ebtesam Almazrouei, and Julien Launay, “The RefinedWeb dataset for Falcon LLM: outperforming curated corpora with web data, and web data only,” *arXiv preprint arXiv:2306.01116*, 2023.
- [3] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shrutu Bhosale, et al., “Llama 2: Open foundation and fine-tuned chat models,” *arXiv preprint arXiv:2307.09288*, 2023.
- [4] Aohan Zeng, Xiao Liu, Zhengxiao Du, Zihan Wang, Hanyu Lai, Ming Ding, Zhuoyi Yang, et al., “Glm-130b: An open bilingual pre-trained model,” *arXiv preprint arXiv:2210.02414*, 2022.
- [5] Yoshua Bengio, Jérôme Louradour, Ronan Collobert, and Jason Weston, “Curriculum learning,” in *Proceedings of the 26th annual international conference on machine learning*, 2009, pp. 41–48.
- [6] Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt, “Measuring massive multitask language understanding,” *arXiv preprint arXiv:2009.03300*, 2020.
- [7] Yuzhen Huang, Yuzhuo Bai, Zhihao Zhu, Junlei Zhang, Jinghan Zhang, Tangjun Su, Liu, et al., “C-eval: A multi-level multi-discipline chinese evaluation suite for foundation models,” *arXiv preprint arXiv:2305.08322*, 2023.
- [8] Haonan Li, Yixuan Zhang, Fajri Koto, Yifei Yang, Hai Zhao, Yeyun Gong, Nan Duan, and Timothy Baldwin, “Cmmmlu: Measuring massive multitask language understanding in chinese,” *arXiv preprint arXiv:2306.09212*, 2023.
- [9] Xiaotian Zhang, Chunyang Li, Yi Zong, Zhengyu Ying, Liang He, and Xipeng Qiu, “Evaluating the performance of large language models on gaokao benchmark,” *arXiv preprint arXiv:2305.12474*, 2023.
- [10] Liang Xu, Anqi Li, Lei Zhu, Hang Xue, Changtai Zhu, Kangkang Zhao, Haonan He, Xuanwei Zhang, Qiyue Kang, and Zhenzhong Lan, “Superclue: A comprehensive chinese large language model benchmark,” *arXiv preprint arXiv:2307.15020*, 2023.
- [11] Miquel Esplà-Gomis, Mikel L Forcada, Gema Ramírez-Sánchez, and Hieu Hoang, “Paracrawl: Web-scale parallel corpora for the languages of the eu,” in *Proceedings of Machine Translation Summit XVII: Translator, Project and User Tracks*, 2019, pp. 118–119.
- [12] Holger Schwenk, Vishrav Chaudhary, Shuo Sun, Hongyu Gong, and Francisco Guzmán, “Wikimatrix: Mining 135m parallel sentences in 1620 language pairs from wikipedia,” in *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, 2021, pp. 1351–1361.
- [13] Liang Xu, Xuanwei Zhang, and Qianqian Dong, “Cluecorpus2020: A large-scale chinese corpus for pre-training language model,” *arXiv preprint arXiv:2003.01355*, 2020.
- [14] Yudong Li, Yuqing Zhang, Zhe Zhao, Linlin Shen, Weijie Liu, Wei-quan Mao, and Hui Zhang, “Csl: A large-scale chinese scientific literature dataset,” in *Proceedings of the 29th International Conference on Computational Linguistics*, 2022, pp. 3917–3923.
- [15] Yan Gong Yiping Peng Qiang Niu Baochang Ma Yunjie Ji, Yong Deng and Xiangang Li, “Belle: Be everyone’s large language model engine,” <https://github.com/LianjiaTech/BELLE>, 2023.
- [16] Ning Ding, Yulin Chen, Bokai Xu, Yujia Qin, Zhi Zheng, Shengding Hu, et al., “Enhancing chat language models by scaling high-quality instructional conversations,” *arXiv preprint arXiv:2305.14233*, 2023.
- [17] Jason Wei, Maarten Bosma, Vincent Zhao, Kelvin Guu, Adams Wei Yu, et al., “Finetuned language models are zero-shot learners,” in *International Conference on Learning Representations*.
- [18] Ge Zhang, Yemin Shi, Ruibo Liu, Ruibin Yuan, Yizhi Li, Siwei Dong, Yu Shu, Zhaoqun Li, Zekun Wang, Chenghua Lin, Wenhao Huang, and Jie Fu, “Chinese open instruction generalist: A preliminary release,” 2023.
- [19] Zhe Zhao, Yudong Li, Cheng Hou, Jing Zhao, Rong Tian, Weijie Liu, Yiren Chen, et al., “TencentPretrain: A scalable and flexible toolkit for pre-training models of different modalities,” in *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 3: System Demonstrations)*, Toronto, Canada, July 2023, pp. 217–225, Association for Computational Linguistics.